


# T1 RHTP

## IoT data tracking device

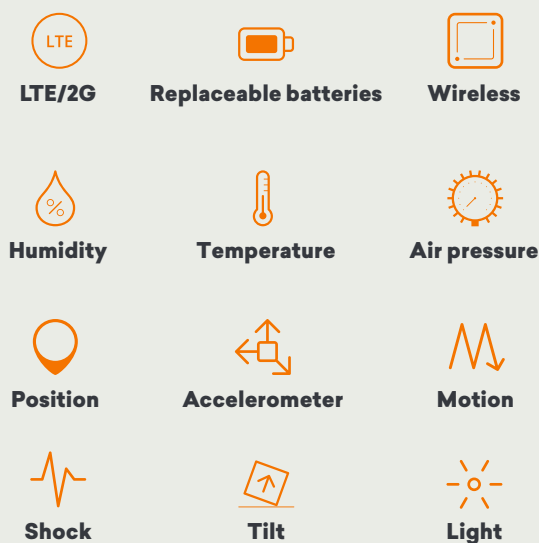

**T1** is a small IoT tracking device and data logger designed for **data tracking and monitoring** of any asset – stationary or moving – where certain conditions are essential for compliance or safety.

This **RHTP** edition features high precision **humidity, temperature and air pressure** monitoring in one device. Its **wireless casing** makes it suitable for installation directly on the asset you wish to monitor and protect.

This makes it especially suited for use in logistics and supply chain tracking or in connection with any monitoring of **sensitive equipment** to ensure compliance or healthy working conditions.

Device is **managed online** on the Trusted Data Portal. The portal visualizes data on maps, in graphs, and in reports. Features include automatic compliance data, map navigation, incident alarms etc. API is available.

**T1** is a small IoT device for data monitoring and tracking of assets and equipment locally and globally.

Highlights include wireless casing, replaceable long-life batteries, global GSM connectivity and advanced and intelligent sensor technology.

**T1 RHTP edition** features high precision humidity, temperature and air pressure monitoring with LTE Cat-M1 network technology incl. 2G fallback.



**Two quality long-life batteries** are included and can be replaced when needed. Use only authorized ER14505M cells. Battery lifetime varies on settings.

When mounted, devices track high-precision data such as motion, shock, vibration, and handling of your assets using a built-in **3-axis accelerometer**.

Other sensors track light while position data is available through **built-in GPS** or via mobile network triangulation if GPS is not accessible.

Global mobile network roaming is available with the communication technology LTE Cat-M1 (2G fallback). **All data is logged** internally on the device between transmissions or when outside of data coverage.

Trusted devices are in operation **all over the world** in industries like logistics, security, wind, and construction.

## Specifications



### Type: T1.420

|                                            |                                                                                                |
|--------------------------------------------|------------------------------------------------------------------------------------------------|
| Battery lifetime<br>(2 batteries inserted) | Typically 2700 transmissions based on 1 transmission/day *                                     |
| Trackable data                             | Humidity, temperature, air pressure, position, motion, tilt, rotation, vibration, shock, light |
| Data log features                          | Stores 300 data entries (as default) on internal storage incl. all sensor data.                |
| Antenna, GPS                               | Internal                                                                                       |
| Antenna, LTE/2G                            | Internal                                                                                       |
| Network technology                         | LTE Cat M1 / GSM EGPRS (850/900/1800/1900MHz)                                                  |
| SIM                                        | Embedded, subscription required                                                                |
| Server communication                       | LTE/2G                                                                                         |
| Server protocols                           | API available upon request                                                                     |
| Configuration                              | Via server                                                                                     |
| Housing                                    | PA6 (nylon)                                                                                    |
| IP rating                                  | IP53                                                                                           |
| Maximum allowed continuous acceleration    | 8 g                                                                                            |
| Dimensions                                 | 68 x 68 x 28,5 mm                                                                              |
| Weight                                     | 120 gram                                                                                       |
| Battery package                            | 2 pcs ER14505M (replaceable)                                                                   |
| Lithium content                            | < 2 gram (0.7 gram in 1 pcs ER14505M)                                                          |
| Temperature, operating                     | -30 °C to +85 °C                                                                               |
| Temperature, storage                       | +30 °C max (recommended)                                                                       |
| ADR                                        | UN3091                                                                                         |
| US content                                 | 0%                                                                                             |
| ECCN                                       | EAR99                                                                                          |
| HS (TARIC export) code                     | 852691                                                                                         |
| Country of origin                          | Made in Denmark                                                                                |

\*) Depending on signal and temperature conditions. 10% extra transmissions with GPS disabled and location based upon triangulation.

## RHTP specifications

|                            |                                                                |
|----------------------------|----------------------------------------------------------------|
| Sensor operating range     | 0 to 100% rel. humidity<br>-30° C to +85° C<br>300 to 1100 hPa |
| Humidity sensor accuracy   | ±3% rel. humidity                                              |
| Humidity sensor hysteresis | ±1% rel. humidity                                              |
| Temperature accuracy       | ±0,5° C at 25° C<br>±1,5° C at full scale                      |
| Air pressure accuracy      | ±1.7 hPa at -20° C to 0° C<br>±1.0 hPa at 0° C to 65° C        |

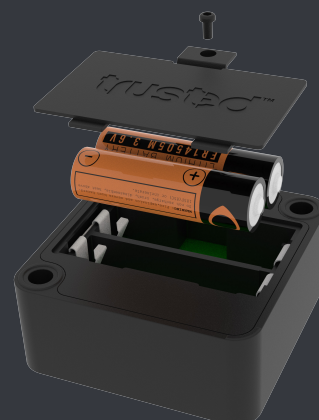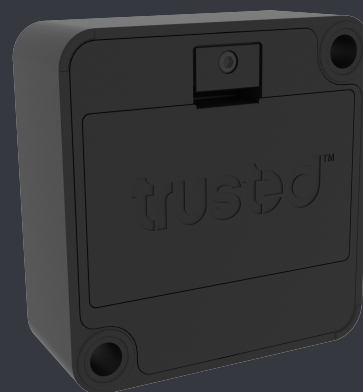

Version 2.2 - Subject to change without notice.  
This data sheet references to firmware 3.60 or newer.